



➤ 2 Part Epoxy Mortar


The sealant in step with the aesthetic evolution of mosaic tiles.



➤ The colours are designed to allow the chromatically homogeneous grouting of mosaic tiles with different shades of colour, transparent or opaque tiles.

➤ The grouting of back-painted glass mosaic tiles or tiles made from different materials such as glass and ceramic.

- ✓ MAKES GROUTS IMPERCEPTIBLE
- ✓ ANTI-STAIN
- ✓ UNIFORM COLORS AND COMPACT
- ✓ EASY MAINTENANCE

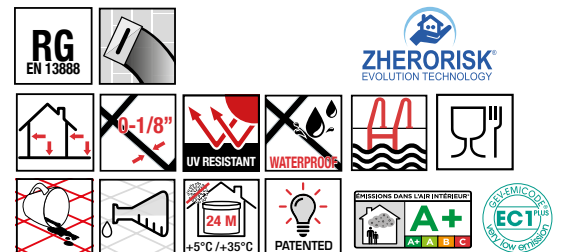

➤ Chromatic uniformity between different materials

Starlike® ColorCrystal EVO is also especially recommended for grouting back-painted glass mosaics or mosaics composed of different materials such as glass and ceramics.

Perfect chromatic uniformity is achieved between the joints and mosaic tiles, producing a strong, visually continuous, effect in any housing context.

➤ Simple application and cleaning

The special epoxy resin blend made of glass beads with a very fine particle size is the secret of product's fluidity that makes easy both the application and the cleaning steps, conferring smooth and compact appearance to the grout.

Starlike® ColorCrystal EVO keeps the aesthetic characteristics of the surfaces over time: it is non-absorbent, easy to clean, suitable even in case of environments having high humidity.



➤ Resistent to chemical contact and exposure to uv rays









Starlike®ColorCrystal EVO resists mechanical stress, chemical contact, exposure to UV rays and guarantees the durability of surfaces and their conservation over time, preserving the beauty of the mosaics and the living quality of the environments.





> Application



- 1  Empty completely all the contents of the catalyst (B) onto the paste (A).
- 2  Mix at slow speed using an electric drill equipped with mixing paddle. Scrape the walls of the bucket to eliminate all parts of non-catalysed product.
- 3  The joints must be dry. Introduce the mortar into the joints using the suitable green rubber float (art. 946GR) spreading diagonally across the joints. Remove the excess product.
- 4  The grout must be cleaned while the product is still wet. Sprinkle clean water. Initial cleaning using a moistened white felt (art. 109/GBNC) making circular movements. Ensure no water enters the joints. Any adjustments to the grout must be performed before cleaning with water.
- 5  Now perform a second cleaning with a rigid cellulose sponge (art. 128G0001).
- 6  Any stains of the transparent product can be removed after 24 hours or anyway after the gap has hardened. Use HAZE REMOVER. Spread HAZE REMOVER with the white felt.
- 7  Leave on for 15-30 minutes. Scrub the surface with the white felt.
- 8  Rinse with clean water. Dry immediately with a clean cloth and do not wait for the evaporation of the rinse water.

Mixture life: About 1 hour at T= +23°C / 73,4°F

Application temperature: from +12°C to +30°C / From + 64,4°F to 73,4°F

Recommended application temperature: from +18°C to +23°C / From 64,4°F to 73,4

Walkable after: 24 hours at T= +23°C / 73,4°F

Ready for use: 5 days at T= +23°C / 73,4°F

Storage time: 24 months in original packaging, avoid freezing temperatures.

Packaging: 1, 2.5 and 5 kg buckets

Mixing ratios: Component A: 93.7 parts by weight - Component B: 6.3 parts by weight -

The two components are pre-measured in their respective packaging

Consistency of the mix: creamy grout

Specific gravity of mix: 1.55 kg/l

Joint width: Up to 3 mm



ADVISED TOOLS

